



DIMENSIONS AND WEIGHTS


NOVA 180

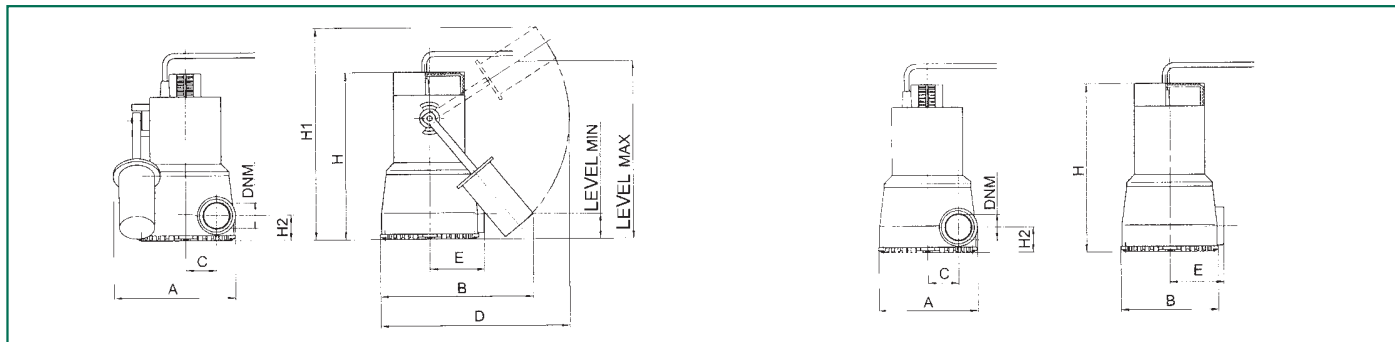


NOVA 200

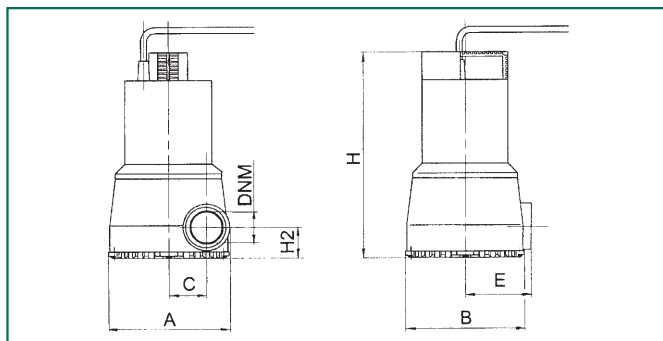


NOVA 300

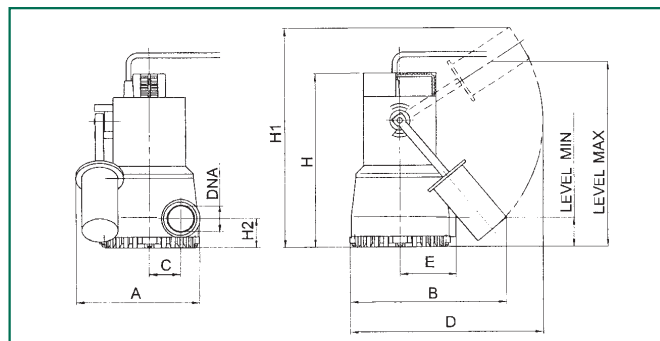

NOVA 600

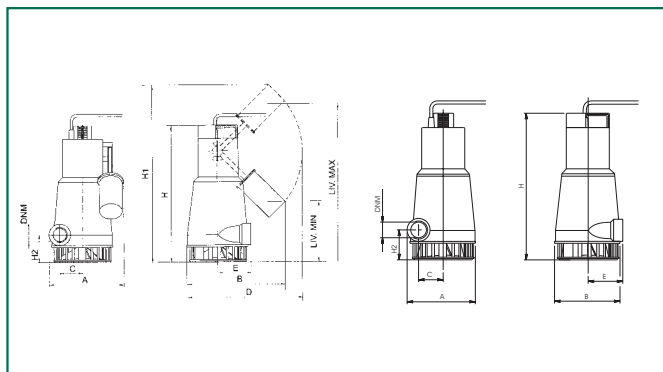

FEKA 600

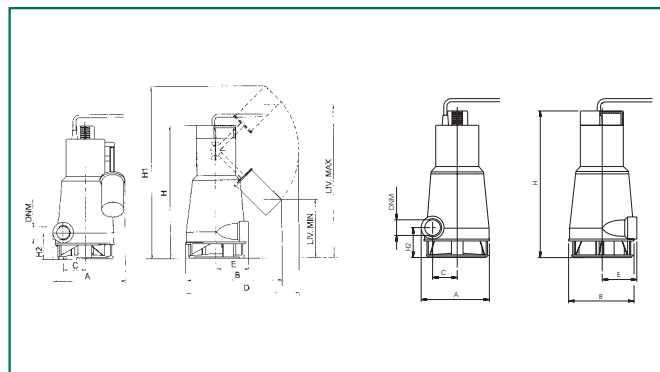

MODEL	A	B	C	D	E	H	H1	H2	LEVEL MIN.	LEVEL MAX	DNM	PACKAGING DIMENSIONS			VOLUME m ³	WEIGHT Kg
												L/A	L/B	H		
NOVA 180 M-A	181	235	46	296	82	253	345	38	77	277	1/4"G	287	202	320	0,019	4,6
NOVA 180 M-NA	148	148	46	—	82	253	—	38	—	—	1/4"G	287	202	320	0,019	4,5
NOVA 180 M-A SV *	181	235	46	296	82	253	345	38	77	277	1/4"G	287	202	320	0,019	4,6
NOVA 180 M-NA SV *	148	148	46	—	82	253	—	38	—	—	1/4"G	287	202	320	0,019	4,5
NOVA 200 M-NA	148	148	46	—	82	253	—	38	—	—	1/4"G	287	202	320	0,019	4,5
NOVA 200 M-NA SV *	148	148	46	—	82	253	—	38	—	—	1/4"G	287	202	320	0,019	4,5
NOVA 300 M-A	181	235	46	296	82	262	354	47	85	285	1/4"G	287	202	320	0,019	4,6
NOVA 300 M-A SV *	181	235	46	296	82	262	354	47	85	285	1/4"G	287	202	320	0,019	4,6
NOVA 600 M-A	193	235	56	296	90	368	443	73	190	390	1/4"G	287	202	431	0,025	7
NOVA 600 (M-T)-NA	162	160	56	—	90	368	—	73	—	—	1/4"G	287	202	431	0,025	6,7
NOVA 600 M-A SV *	193	235	56	296	90	368	443	73	190	390	1/4"G	287	202	431	0,025	7
NOVA 600 (M-T)-NA SV *	162	160	56	—	90	368	—	73	—	—	1/4"G	287	202	431	0,025	6,7
FEKA 600 M-A	193	235	56	296	90	368	443	73	190	390	1/4"G	287	202	431	0,025	7
FEKA 600 (M-T)-NA	162	160	56	—	90	368	—	73	—	—	1/4"G	287	202	431	0,025	6,7
FEKA 600 M-A SV *	193	235	56	296	90	368	443	73	190	390	1/4"G	287	202	431	0,025	7
FEKA 600 (M-T)-NA SV *	162	160	56	—	90	368	—	73	—	—	1/4"G	287	202	431	0,025	6,7

* With special stainless steel motor shaft.

NOVA SALT

Pump data :

Model :
NOVA SALT W M-A
Pressure rating :
Min. fluid temperature :
Max. fluid temperature :
Max. Temperature operating :

Requested data :

Flow 0 m³/h
Head 0 m
Fluid : Water
Fluid Temperature : 20 °C
Density : 0,9983 kg/dm³
Kinematic viscosity 1,005 mm²/s
Vapor pressure : 2,337 kPa

Materials :


Pump body PP OMO 30% FVAC
Impeller PPO/PPE 20% FV
Motor shaft DRAWN BARS STEEL INOX
Filter PP OMO 30% FVAC
Motor casing SHEET METAL Fe P01 0.65mm
OR ring NBR 70
Ceramic bushing DRAWN BARS STEEL INOX


Motor data :


Nominal power P2: 0,2 kW
Rated speed: 2800 1/min
Rated voltage : 1~ 230 V 50 Hz
Nominal current : 1,3 A
Degree of protection : IP 68



Curve tolerance according to ISO 9906

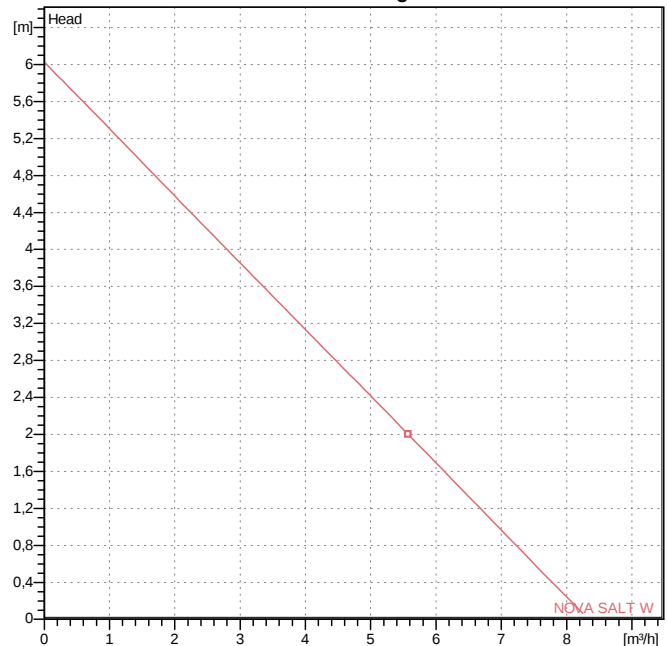

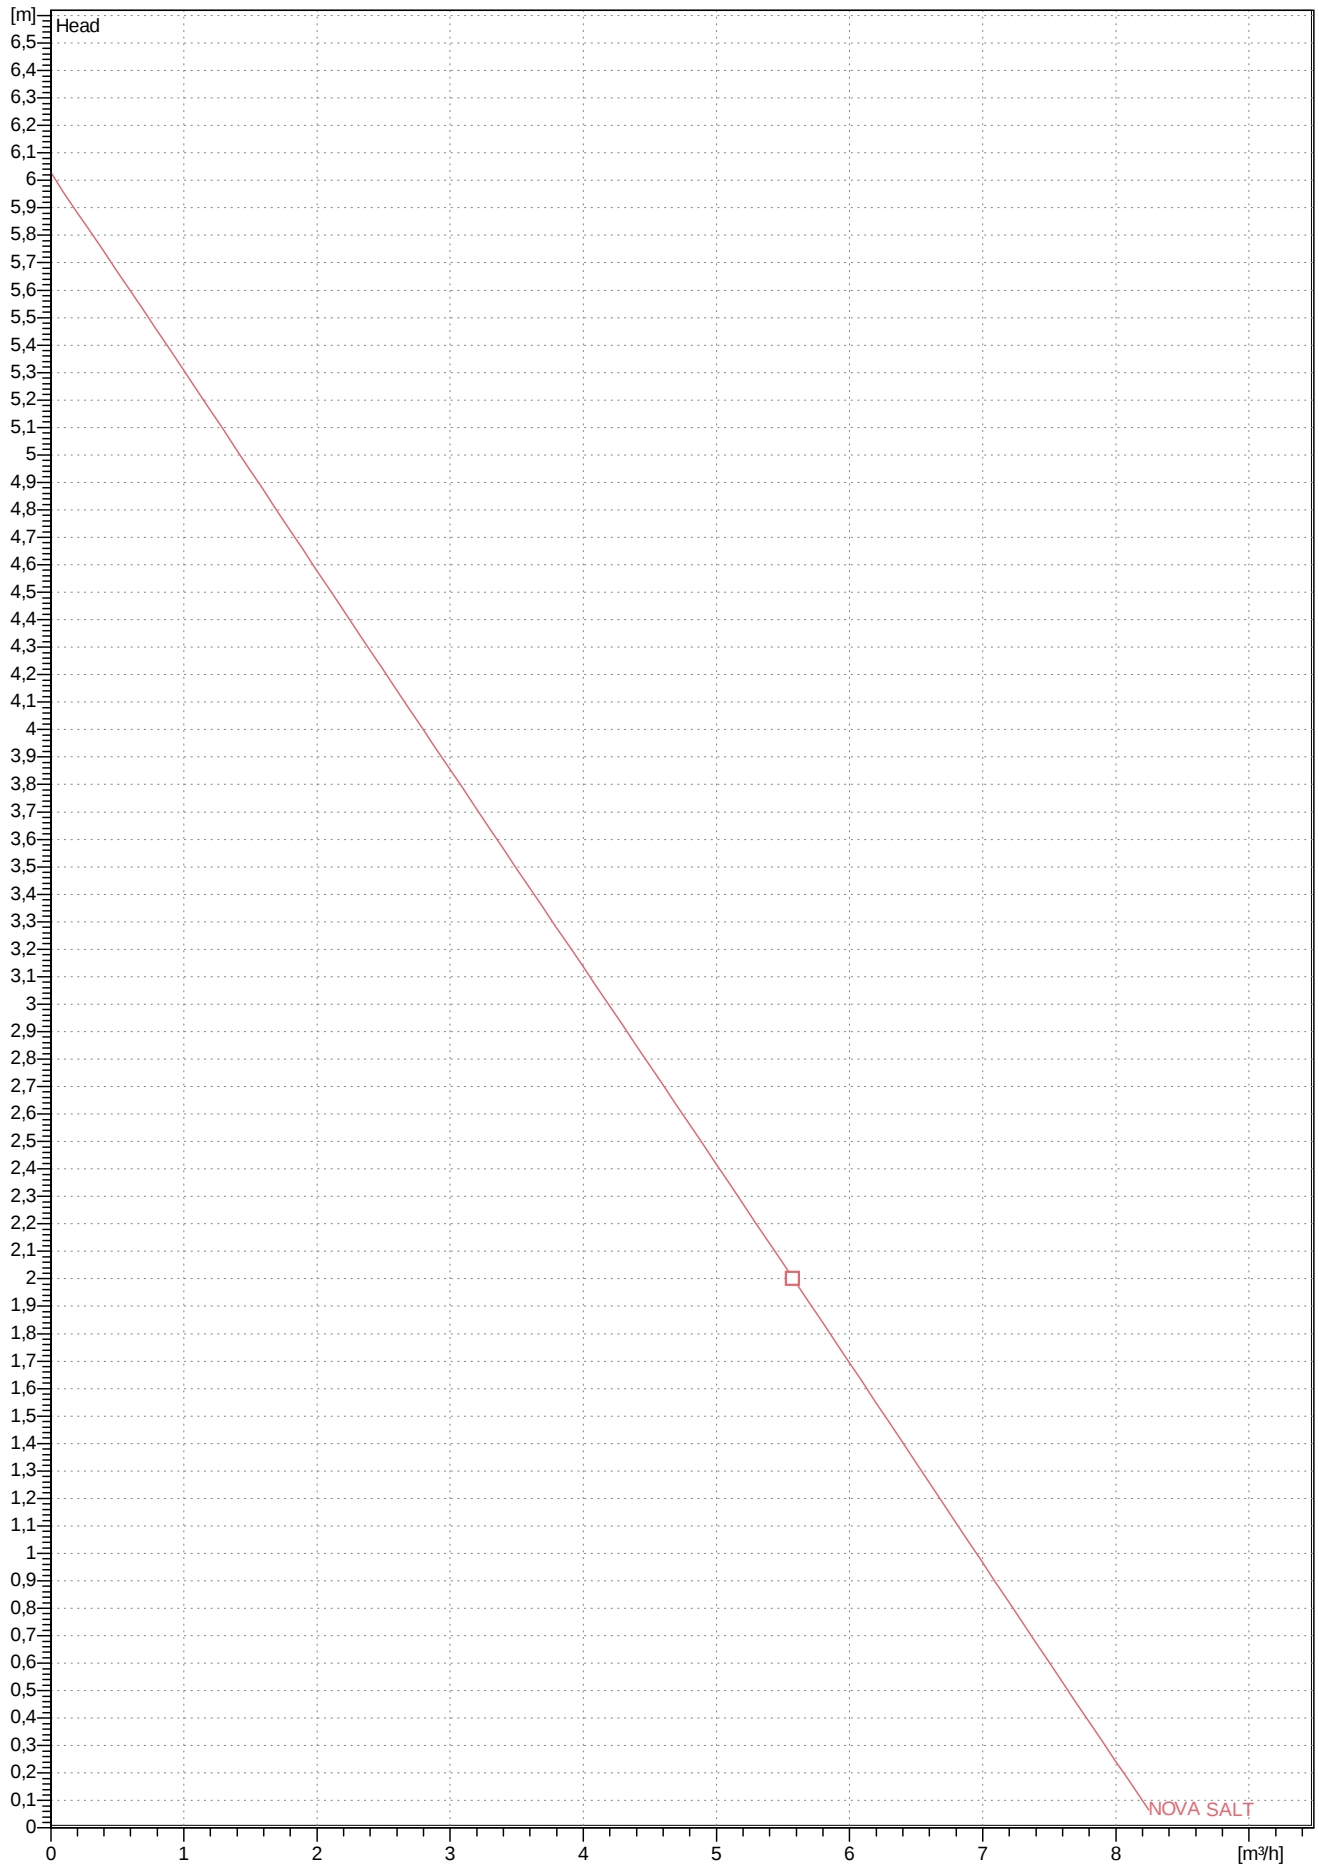

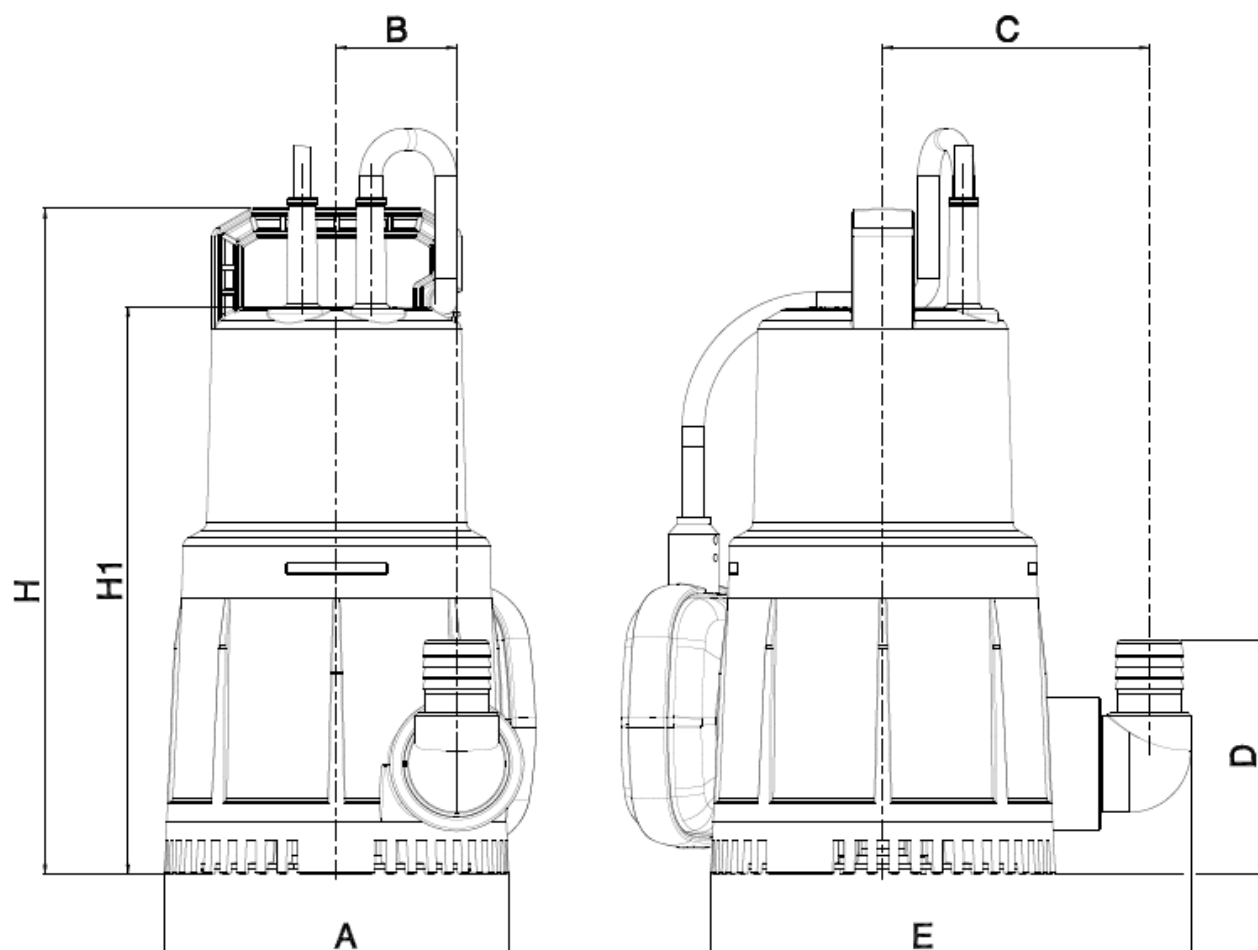

Dimensions in mm		
1	A	140
2	B	48
3	C	107
4	D	95
5	E	195
6	H	270
7	H1	230